


3H Series

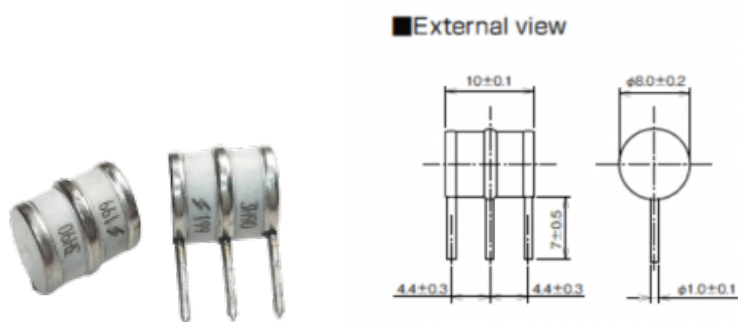

Characteristics

Item	Part	DC Breakdown Voltage	Impulse Breakdown Voltage	Insulation	DC Holdover Voltage	Impulse Life (L1+L2-E)	Impulse Discharge Current (L1+L2-E)	AC Discharge Current (L1+L2-E)
Code	Number	(L1-E) (L2-E)	(L1-E) (L2-E)	Resistance		(10/1000μs 200A)	(8/20μs)	(50Hz)
	(Model J1)	100V/s	1kV/μs			10 Times	1 Second	
11019847	3H-90J1	90V± 20 %	≤ 500V	≥ 10,000 MΩ	≤ 52V	300 Times	10 kA	10A, 10 Times
11012631	3H-230J1	150V± 20%	≤ 700V	≥ 10,000 MΩ	≤ 135V	300 Times	10 kA	10A, 10 Times
11018905	3H-150J1	230V± 20%	≤ 600V	≥ 10,000 MΩ	≤ 52V	300 Times	10 kA	10A, 10 Times