3Y06 Series

■External view

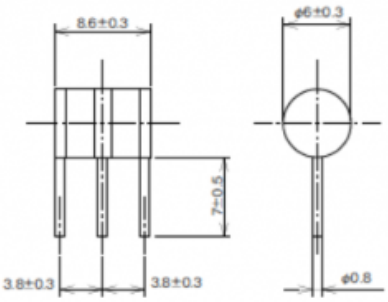

Characteristics

Part Number	Part Number	DC Breakdown Voltage (L1-E)(L2-E)	Impulse Breakdown Voltage (L1-E)(L2-E)	Insulation Resistance	Capacitance (1 MHz)	DC Holdover Voltage	Impulse Life (10/1000μs 200A)	Impulse Discharge Current (8/20μs)	AC Discharge Current (L1+L2-E)
(Model A)	(Model P1)								(50Hz)
		100V/s	1kV/μs					10 Times	1 Second
3Y06-90A	3Y06-90P1	90V	≤ 850V	≥ 10,000 MΩ	≤ 3.0pF	≤ 52V	100 Times	5 kA	5A, 5 Times
3Y06-230A	3Y06-230P1	230V	≤ 700V	≥ 10,000 MΩ	≤ 3.0pF	≤ 135V	100 Times	10 kA	10A, 5 Times
3Y06-350A	3Y06-350P1	350V	≤ 750V	≥ 10,000 MΩ	≤ 3.0pF	≤ 150V	100 Times	5 kA	5A, 5 Times