


3YW Series



■ External view

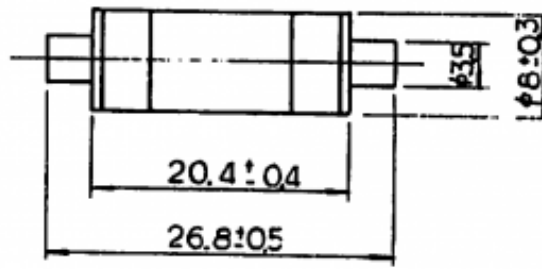

Characteristics

Part Number	Part Number	DC Breakdown Voltage		Impulse Breakdown Voltage		Insulation Resistance	DC Holdover Voltage	Impulse Life (L1+L2-E) (8/20μs 1000A)	Impulse Discharge Current (L1+L2-E)		AC Discharge Current (L1+L2-E)	
		(L1-E)	(L2-E)	(L1-E)	(L2-E)				(8/20μs)		(50Hz)	
(Model A)	(Model YZ)	100V/s	100V/s	100V/s	1kV/μs	≥ 10,000 MΩ	≤ 150V	1,000 Times	1 Time	10 Times	9 Cycles 1 Time	1 Second
3YW-230A	3YW-230YZ	230V	≤ 600V	≤ 800V								40 kA
3YW-350A	-	350V	≤ 650V	≤ 850V					40 kA	20 kA	400A	10A, 10 Times
3YW-400A	3YW-400YZ	400V	≤ 700V	≤ 900V					40 kA	20 kA	400A	10A, 10 Times