


CA Series

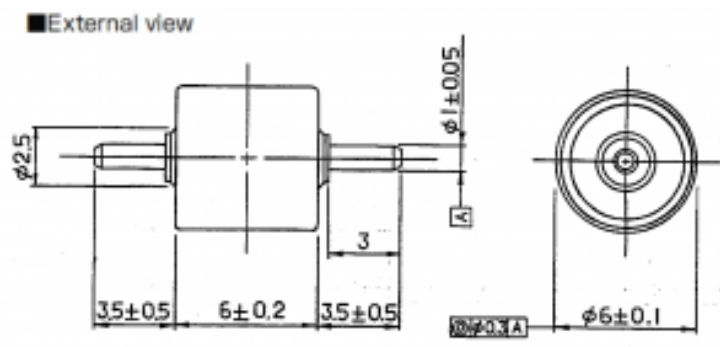

Characteristics

Part	DC Breakdown Voltage ⁽¹⁾	Impulse Breakdown Voltage	Insulation Resistance ⁽²⁾	Capacitance (1MHz)	Impulse Life	Impulse Discharge Current		Plating
						8/20μsec, 5kA	8/20μsec, 10kA	
Number	100V/s	1kV/μs			10/1000μs, 100A			
CA-200	200V	≤ 700V	≥ 10,000 MΩ	≤ 1.5pF	300 Times	10 Times	1 Time	Nickel
CA-200(tin)	200V	≤ 700V	≥ 10,000 MΩ	≤ 1.5pF	300 Times	10 Times	1 Time	Tin
CA-400	400V	≤ 700V	≥ 10,000 MΩ	≤ 1.5pF	100 Times	10 Times	1 Time	Nickel