


CA Series

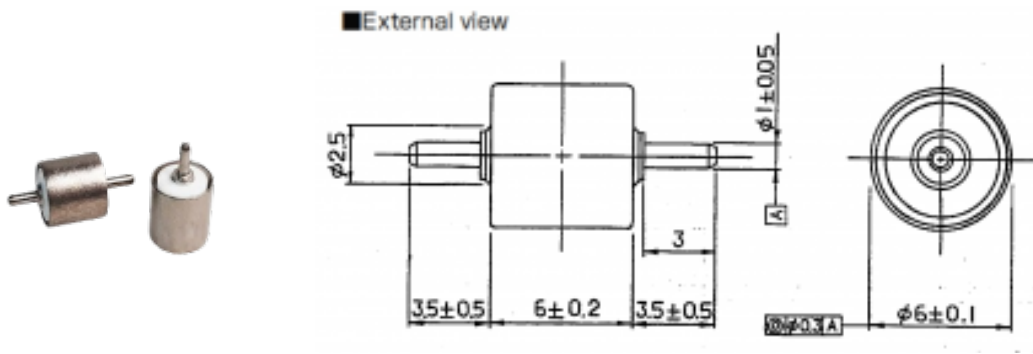

Characteristics

Part	DC Breakdown Voltage ⁽¹⁾	Impulse Breakdown Voltage	Insulation Resistance ⁽²⁾	Capacitance (1MHz)	Impulse Discharge Current		Plating	
					Impulse Life			
Number	100V/s	1kV/ μ s			10/1000 μ s, 100A	8/20 μ sec, 5kA	8/20 μ sec, 10kA	
CA-200	200V	$\leq 700V$	$\geq 10,000 M\Omega$	$\leq 1.5pF$	300 Times	10 Times	1 Time	Nickel
CA-200(tin)	200V	$\leq 700V$	$\geq 10,000 M\Omega$	$\leq 1.5pF$	300 Times	10 Times	1 Time	Tin
CA-400	400V	$\leq 700V$	$\geq 10,000 M\Omega$	$\leq 1.5pF$	100 Times	10 Times	1 Time	Nickel