


SDH4 Series

■ External view

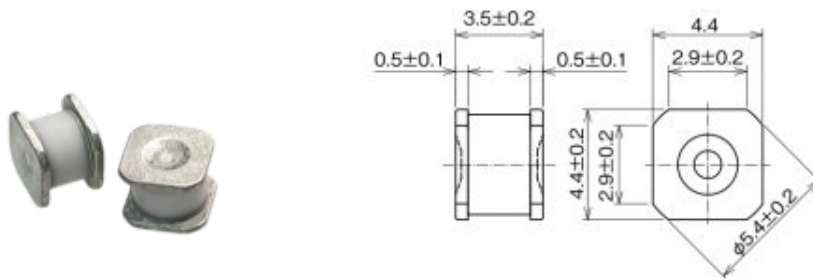

Characteristics

Part Number	DC Breakdown Voltage ⁽¹⁾	Impulse Breakdown Voltage	Capacitance ⁽²⁾	Insulation Resistance ⁽³⁾	DC Holdover Voltage ⁽⁴⁾	Impulse Life	Impulse Discharge Current (8/20 μ sec)	AC Discharge Current (50Hz)
								1 Second
SDH4-75	75V	$\leq 600V$	≤ 0.5 pF	$\geq 10,000$ M Ω	$\leq 52V$	300 Times	5 kA 10 Times ⁽⁵⁾	5A 10 Times
SDH4-90	90V	$\leq 600V$	≤ 0.5 pF	$\geq 10,000$ M Ω	$\leq 52V$	300 Times	5 kA 10 Times ⁽⁵⁾	5A 10 Times
SDH4-145	145V	$\leq 600V$	≤ 0.5 pF	$\geq 10,000$ M Ω	$\leq 80V$	300 Times	5 kA 10 Times ⁽⁵⁾	5A 10 Times
SDH4-200	200V	$\leq 600V$	≤ 0.5 pF	$\geq 10,000$ M Ω	$\leq 135V$	300 Times	5 kA 10 Times ⁽⁵⁾	5A 10 Times
SDH4-200SVSS	200V	$\leq 800V$	≤ 0.5 pF	$\geq 10,000$ M Ω	$\leq 135V$	300 Times	5 kA 10 Times ⁽⁵⁾	5A 10 Times
SDH4-230	230V	$\leq 650V$	≤ 0.5 pF	$\geq 10,000$ M Ω	$\leq 135V$	300 Times	5 kA 10 Times ⁽⁵⁾	5A 10 Times
SDH4-350 (6)	350V	$\leq 700V$	≤ 0.5 pF	$\geq 10,000$ M Ω	$\leq 135V$	300 Times	5 kA 10 Times ⁽⁵⁾	5A 10 Times