


Y06S n Y06SZ Series

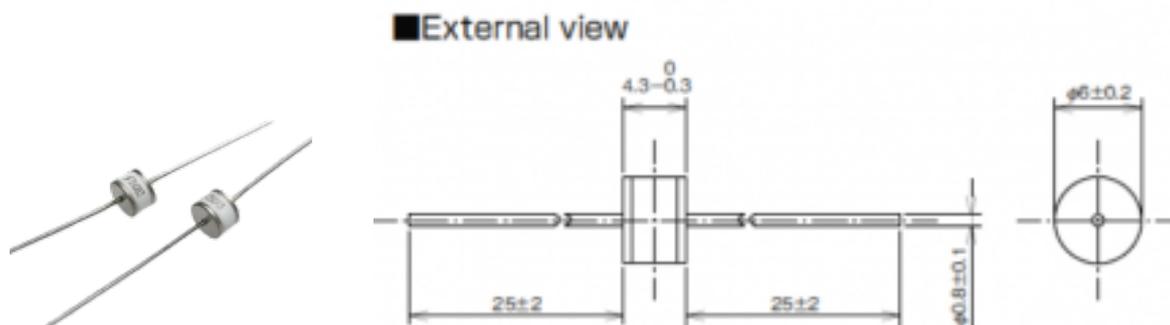

Characteristics

Part Number	Part Number	DC Breakdown Voltage ⁽¹⁾	Impulse Breakdown Voltage		DC Holdover Voltage ⁽³⁾	Impulse Life (10/1000μs 100A)	Impulse Discharge Current (8/20μs)		AC Discharge Current (50Hz)	
			100V/μs	1kV/μs			1 Time	10 Times ⁽⁴⁾	9 Cycles 1 Time	1 Second
(Model A)	(Model B1)	100V/s	100V/μs	1kV/μs						
	Y06S-90B1	90V	≤ 500V	≤ 700V	≤ 52V	200 Times	3 kA	2.5 kA	20 A	5A, 10 Times
Y06S-100A	Y06S-100B1	100V	≤ 500V	≤ 700V	≤ 52V	200 Times	3 kA	2.5 kA	20 A	5A, 10 Times
Y06SZ-230A	Y06SZ-230B1	230V	≤ 500V	≤ 700V	≤ 135V	200 Times	10 kA	5 kA	20 A	5A, 10 Times
Y06SZ-350A	Y06SZ-350B1	350V	≤ 600V	≤ 800V	≤ 135V	200 Times	10 kA	5 kA	20 A	5A, 10 Times